

# Verification of the Origins of Rotation in Thunderstorms Experiment-Southeast 2017 (VORTEX-SE\_2017) NOAA/ARL/ATDD Mobile Radiosonde Data Set

## 1.0 Contacts:

### NCAR/EOL Processing and Quality Control:

Scot Loehrer (NCAR/EOL)

[loehrer@ucar.edu](mailto:loehrer@ucar.edu)

### Original Data Source:

Temple Lee ([temple.lee@noaa.gov](mailto:temple.lee@noaa.gov))

## 2.0 Dataset Overview

The NOAA/ARL/ATDD (NOAA/Air Resources Laboratory/Atmospheric Turbulence and Diffusion Division) utilized two mobile radiosonde systems to release radiosondes at locations around northern Alabama (Figure 1) during VORTEX-SE 2017 Intensive Observation Periods (IOPs). This data set includes the 55 high resolution, quality controlled NOAA/ARL/ATDD mobile soundings released for the VORTEX-SE\_2017 field phase (25 March to 1 May 2017).

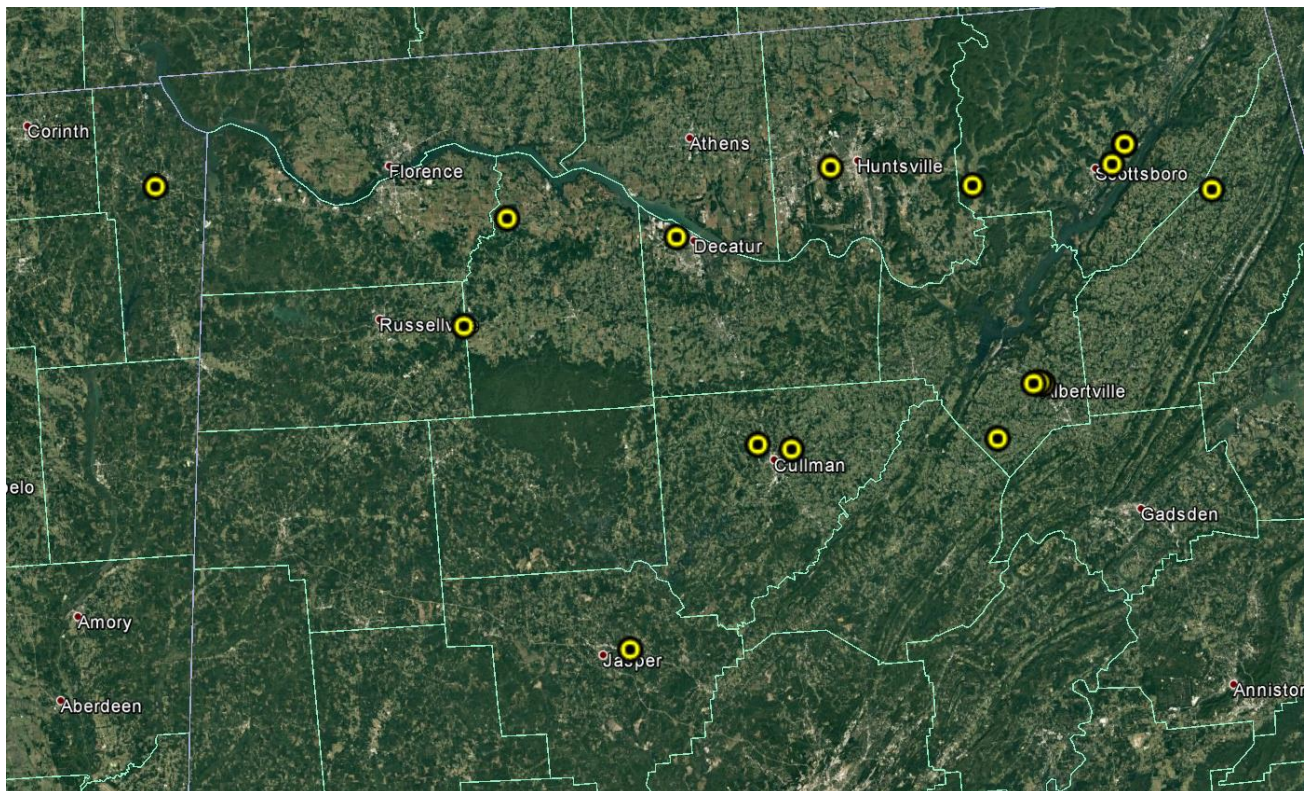


Figure 1. Location of VORTEX-SE\_2017 NOAA/ARL/ATDD mobile radiosonde sites.

## 3.0 Project Overview

The **Verification of the Origins of Rotation in Tornadoes Experiment-Southeast (VORTEX-SE)** is a research program to understand how environmental factors characteristic of the southeastern United States affect the formation, intensity,

structure, and path of tornadoes in this region. VORTEX-SE will also determine the best methods for communicating forecast uncertainty related to these events to the public, and evaluate public response. For the 2017 field season a large array of fixed and mobile ground instrumentation were deployed around Huntsville, AL from 8 March to 8 May 2017. Further information on VORTEX-SE is available at the VORTEX-SE web site at NCAR/EOL: [https://www.eol.ucar.edu/field\\_projects/vortex-se](https://www.eol.ucar.edu/field_projects/vortex-se) and information on the VORTEX-SE\_2017 deployments is available at the VORTEX-SE\_2017 Field Catalog: [http://catalog.eol.ucar.edu/vortex-se\\_2017](http://catalog.eol.ucar.edu/vortex-se_2017).

#### 4.0 EOL Sounding Composite (ESC) File Format Description

The ESC is a columnar ASCII format consisting of 15 header records for each sounding followed by the data records with associated data quality flags.

##### 3.1 Header Records

The header records (15 total records) contain a variety of metadata about the sounding (i.e. location, time, radiosonde type, etc). The first five header lines contain information identifying the sounding, and have a rigidly defined form. The following 7 header lines are used for auxiliary information and comments about the sounding, and may vary from dataset to dataset. The last 3 header records contain header information for the data columns. Line 13 holds the field names, line 14 the field units, and line 15 contains dashes ('-' characters) delineating the extent of the field.

The file standard header lines are as follows:

Line	Label (padded to 35 char)	Contents
1	Data Type:	Description of the type and resolution of data
2	Project ID:	Short name for the field project
3	Release Site Type/Site ID:	Description of the release site.
4	Release Location (lon,lat,alt):	Location of the release site.
5	UTC Release Time (y,m,d,h,m,s):	Time of release.

The release location is given as:

lon (deg min), lat (deg min), lon (dec. deg), lat (dec. deg), alt (m)

Longitude in deg min is in the format: ddd mm.mm'W where ddd is the number of degrees (with leading zeros if necessary), mm.mm is the decimal number of minutes, and W represents W or E for west or east longitude, respectively. Latitude has the same format as longitude, except there are only two digits for degrees and N or S for north/south latitude.

The time of release is given as: yyyy, mm, dd, hh:nn:ss.

Where yyyy is the year, mm is the month, dd is the day of month, and hh:nn:ss are the UTC hour, minute, and second respectively.

The seven non-standard header lines may contain any label and contents. The labels are padded to 35 characters to match the standard header lines. Records for this data set include the following non-standard header lines:

Line	Label (padded to 35 char)	Contents
6	Ascension Number	Number sounding this year
7	Radiosonde Serial Number	
8	Balloon Manufacturer/Type	
9	Balloon Lot Number/Weight	
10	Radiosonde Type/RH Sensor Type	
11	Surface Observations	

### 3.2 Data Records

The data records each contain time from release, pressure, temperature, dew point, relative humidity, U and V wind components, wind speed and direction, ascent rate, balloon position data, altitude, and quality control flags (see the QC code description). Each data line contains 21 fields, separated by spaces, with a total width of 130 characters. The data are right-justified within the fields. All fields have one decimal place of precision, with the exception of latitude and longitude, which have three decimal places of precision. The contents and sizes of the 21 fields that appear in each data record are as follows:

Field	Width	Format	Parameter	Units	Missing Value
1	6	F6.1	Time since release	Seconds	9999.0
2	6	F6.1	Pressure	Millibars	9999.0
3	5	F5.1	Dry-bulb Temperature	Degrees C	999.0
4	5	F5.1	Dew Point Temperature	Degrees C	999.0
5	5	F5.1	Relative Humidity	Percent	999.0
6	6	F6.1	U Wind Comp	m/s	9999.0
7	6	F6.1	V Wind Comp	m/s	9999.0
8	5	F5.1	Wind speed	m/s	999.0
9	5	F5.1	Wind direction	Degrees	999.0
10	5	F5.1	Ascent Rate	m/s	999.0
11	8	F8.3	Longitude	Degrees	9999.0
12	7	F7.3	Latitude	Degrees	999.0
13	5	F5.1	Elevation Angle	Degrees	999.0
14	5	F5.1	Azimuth Angle	Degrees	999.0
15	7	F7.1	Altitude	Meters	99999.0
16	4	F4.1	QC for Pressure	Code	99.0
17	4	F4.1	QC for Temperature	Code	99.0
18	4	F4.1	QC for Humidity	Code	99.0
19	4	F4.1	QC for U Wind	Code	99.0
20	4	F4.1	QC for V Wind	Code	99.0
21	4	F4.1	QC for Ascent Rate	Code	99.0

Fields 16 through 21 contain the data quality flags from the NCAR/Earth Observing Laboratory (EOL) sounding quality control procedures. The data quality flags are defined as follows:

Code	Description
1.0	Checked, datum seems physically reasonable. ("GOOD")

2.0	Checked, datum seems questionable on a physical basis. ("MAYBE")
3.0	Checked, datum seems to be in error. ("BAD")
4.0	Checked, datum is interpolated. ("ESTIMATED")
9.0	Checked, datum is missing. ("MISSING")
99.0	Unchecked (QC information is "missing".) ("UNCHECKED")

### 3.3 Data Specifics

The files contain data at one-second intervals.

The data are in files by day, so all soundings for a particular day are concatenated into a single file ordered by time. The file naming convention is:

ATDD\_yyyymmdd.cls where yyyy is the year, mm is the month, and dd is the day of the month.

NOAA/ARL/ATDD used GRAW DFM-09 radiosondes which were initialized using the GRAW software package, version 5.10.12.3, installed onto two Dell laptops (Dell Latitude E5570). The accuracy and resolution of the variables measured by the rawinsondes are listed in Table 1.

Table 1: Manufacturer-stated accuracy and resolution for each of the variables sampled by the GRAW DFM-09 rawinsondes

Temperature resolution	0.1°C
Temperature accuracy	< 0.2°C
Humidity resolution	1%
Humidity accuracy	< 5%
Pressure accuracy	< 0.3mb
Geopotential height accuracy	< 10m
Wind speed accuracy	< 0.2 m/s
Horizontal position accuracy	< 5m

NOAA/ARL/ATDD post-processing included filtering times during which the rawinsonde was on the ground. Data recorded when the rawinsondes were descending were also removed from the post-processed files, as were any obvious data outliers.

### 3.4 Sample Data

The following is a sample of the VORTEX-SE\_2017 NOAA/ARL/ATDD high resolution mobile radiosonde data in ESC format.

```

Data Type:                NOAA ATDD1 Mobile Sounding Data/Ascending
Project ID:                VORTEX-SE 2017
Release Site Type/Site ID: Albertville, AL
Release Location (lon,lat,alt): 086 12.09'W, 34 16.41'N, -86.202, 34.274, 326.0
UTC Release Time (y,m,d,h,m,s): 2017, 05, 01, 03:00:00
Radiosonde Type:          GRAW DFM-09
Ground Station Software:  Version 5.10.12.3
/
/
/
/
Nominal Release Time (y,m,d,h,m,s):2017, 05, 01, 03:00:00
Time  Press  Temp  Dewpt  RH    Ucmp  Vcmp  spd  dir  Wcmp  Lon  Lat  Ele  MixR  Alt  Qp  Qt  Qrh  Qu  Qv  Qdz
sec   mb     C     C     %    m/s  m/s  m/s  deg  m/s  deg  deg  deg  g/kg  m   code code code code code code

```

```

-----
0.0 9999.0 999.0 999.0 999.0 9999.0 9999.0 999.0 999.0 999.0 -86.202 34.273 999.0 999.0 326.0 9.0 9.0 9.0 9.0 9.0 9.0
1.0 975.6 18.1 14.0 77.2 -0.1 2.6 2.6 178.0 4.0 -86.202 34.273 999.0 10.4 330.0 99.0 99.0 99.0 99.0 99.0 99.0
2.0 975.2 18.2 14.7 80.2 -0.2 2.7 2.7 176.0 3.5 -86.202 34.274 999.0 10.9 333.5 99.0 99.0 99.0 99.0 99.0 99.0
-----

```

### 3.5 Station List

Site ID	WMO ID	Site Name	State	Latitude	Longitude	Elev (m)
ATDD1	N/A	ATDD1	Mobile	Mobile	Mobile	Mobile
ATDD2	N/A	ATDD2	Mobile	Mobile	Mobile	Mobile

### 4.0 Data Quality Control Procedures

1. Each sounding was converted from its original format into the ESC format described above.
2. Each sounding was passed through a set of automated data quality checks which included basic gross limit checks as well as rate of change checks. This is further described in Section 4.1.
3. Each sounding was visually examined utilizing the NCAR/EOL XQC sounding quality control software. This is further described in Section 4.2.

### 4.1 Automated Data Quality Checks

This data set was passed through a set of automated data quality checks. This procedure includes both gross limit checks on all parameters as well as rate-of-change checks on temperature, pressure, and ascent rate. A version of these checks is described in Loehrer et al. (1996) and Loehrer et al. (1998).

#### 4.1.1 Gross Limit Checks

These checks were conducted on each sounding and the data quality flags in the ESC files were adjusted as appropriate. Only the data point under examination was flagged. All checks also produced warning messages that specified the location of the problem and the severity of the issue. These warning messages were then summarized statistically and examined to determine any consistent issues.

For this data set NCAR/EOL conducted the following gross limit checks. In the table P = pressure, T = temperature, RH = relative humidity, U = U wind component, V = V wind component, B= bad, and Q = questionable.

Parameter	Check	Parameter(s) Flagged	Flag Applied
Pressure	<0 or > 1050	P	B
Altitude	< 0 or >40000	P, T, RH	Q
Temperature	< -90 or > 45	T	B
Dew Point	< -99.9 or > 33 > T	RH T, RH	Q Q
Wind Speed	< 0 or > 100 > 150	U, V U, V	Q B

U Wind	< 0 or > 100 > 150	U U	Q B
V Wind	< 0 or > 100 > 150	V V	Q B
Wind Direction	< 0 or > 360	U, V	B
Ascent Rate	< -10 or > 10	P, T, RH	Q

#### 4.1.2 Vertical Consistency Checks

These checks were conducted on each sounding and the data quality flags in the ESC files were adjusted as appropriate. These checks were started at the surface and compared each neighboring data record. In the case of checks that ensured that the values increased/decreased as expected, only the data point under examination was flagged. However, for the other checks, all of the data points used in the examination were flagged. All items within the table are as previously defined. All checks also produced warning messages that specified the location of the problem and the severity of the issue. These warning messages were then summarized statistically and examined to determine any consistent issues.

Parameter	Check	Parameter(s) Flagged	Flag Applied
Time	Decreasing/equal	None	None.
Altitude	Decreasing/equal	P, T, RH	Q
Pressure	Increasing/equal	P, T, TH	Q
	> 1mb/s or < -1mb/s	P, T, TH	Q
	> 2mb/s or < -2mb/s	P, T, TH	B
Temperature	< -15°C/km	P, T, RH	Q
	< -30°C/km	P, T, RH	B
	> 50°C/km	P, T, RH	Q
	> 100°C/km	P, T, RH	B
Ascent Rate	> 3m/s or < -3m/s	P	Q
	> 5m/s or < -5m/s	P	B

#### 4.2 Visual Data Quality Checks

Each sounding was visually examined using the NCAR/EOL XQC sounding data quality control software. This software allows the user to view a skew-t/log-p diagram of each sounding and apply data quality flags as appropriate. The user can zoom in on sections of soundings for detailed examination and can adjust the data quality flags for an individual point, sections of soundings, or entire soundings for each parameter individually. The software also allows the user to override the quality flags applied by the automated procedure.

#### 4.3 Data Quality Issues of Note

The data quality control procedures outlined above allows us to identify and, in some cases, resolve issues that could potentially impact research performed using these data sets. The following issues were noted in these soundings.

ATDD1 201703251712 – no data above 970mb all data questionable.

**ATDD1 201703272302** – temperature data bad (very warm) above 523mb; long period of descent starting 668mb (drops down to 732mb), much warmer when rising again, flagged Questionable.

**ATDD1 201704051121** – no data above 879mb

**ATDD1 201704052000** – no data above 860mb

**ATDD1 201704052142** – wetbulbing ~744mb

**ATDD1 201704052307** – sonde reports nearly constant height from 25-73 seconds post release; data flagged bad. No data above 530mb

**ATDD1 201704270518** – no data above 952mb

**ATDD1 201704301901** – no data above 906mb

**ATDD1 201704302001** – no data above 905mb

**ATDD1 201704302329** – file excluded from final archive as pressure, altitude, and wind data were all bad.

**ATDD1 201705010300** – large wind speed oscillations above 825mb, data flagged bad, wind speed questionable (likely bad) from 931-824mb. No data above 559mb

**ATDD2 201703251800** – temperature above 396mb cold, flagged bad.

**LI \*cls** – temperature data above 100mb questionable

**ATDD2 201703271900** – wetbulbing ~799mb

**ATDD2 201703280304** – no data above 812mb; wind data questionable (long periods constant/near constant data)

## 5.0 References

Loehrer, S. M., T. A. Edmands, and J. A. Moore, 1996: TOGA COARE upper-air sounding data archive: development and quality control procedures. *Bull. Amer. Meteor. Soc.*, 77, 2651-2671.

Loehrer, S. M., S. F. Williams, and J. A. Moore, 1998: Results from UCAR/JOSS quality control of atmospheric soundings from field projects. Preprints, Tenth Symposium on Meteorological Observations and Instrumentation, Phoenix, AZ, Amer. Meteor. Soc., 1-6.