# Seeded and Natural Orographic Wintertime Clouds: The Idaho Experiment (SNOWIE) High Resolution Radiosonde Composite Data Set

### 1.0 Contacts:

# **NCAR/EOL Processing and Quality Control:**

Scot Loehrer (NCAR/EOL)
<a href="mailto:loehrer@ucar.edu">loehrer@ucar.edu</a>

# 2.0 Dataset Overview

This data set contains a composite of the highest vertical resolution (i.e. the "native resolution") upper air sounding data from all sources for the Seeded and Natural Orographic Wintertime Clouds: The Idaho Experiment (SNOWIE) project. This composite includes soundings from the mobile University of Illinois Urbana-Champaign (UIUC; 34 soundings), the Idaho Power Company (IPC) Crouch (69 soundings) and Lowman (69 soundings) sites, the NCAR Horseshoe Bend site (12 soundings) as well as from 15 National Weather Service (NWS) stations across the western United States (2191 soundings). A map of all of the research radiosonde locations is in Figure 1 and a map of all of the NWS radiosonde locations is in Figure 2.

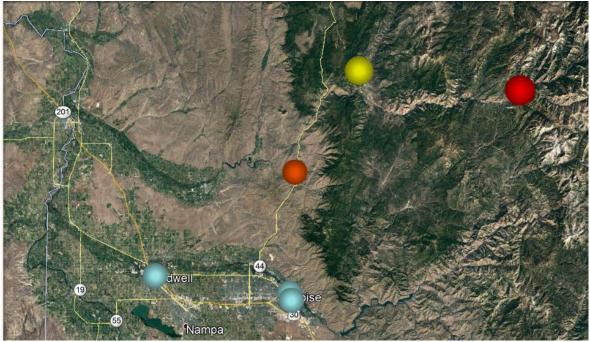


Figure 1. Locations of the research radiosonde systems included in the SNOWIE composite data set. The UIUC mobile sites around Boise and Caldwell are blue. The NCAR SLW Horseshoe Bend site is orange. The IPC Crouch site is yellow and the IPC Lowman site is red.



Figure 2. Locations of the NWS radiosonde stations included in this SNOWIE composite data set.

# 3.0 Project Overview

The Seeded and Natural Orographic Wintertime Clouds: The Idaho Experiment (SNOWIE) project is a research program to understand the natural dynamical and microphysical processes by which precipitation forms and evolves within orographic winter storms and to determine the physical processes by which cloud seeding with silver iodide (AgI), either from ground generators or aircraft, impacts the amount and spatial distribution of snow falling across a river basin. SNOWIE was conducted from 7 January to 17 March 2017 in the Payette Mountains located to the northeast of Boise, ID. Further information on SNOWIE is available at the SNOWIE web site at NCAR/EOL: <a href="https://www.eol.ucar.edu/field\_projects/snowie">https://www.eol.ucar.edu/field\_projects/snowie</a> and information on the SNOWIE deployments is available at the SNOWIE Field Catalog: <a href="https://catalog.eol.ucar.edu/snowie">http://catalog.eol.ucar.edu/snowie</a>.

# 4.0 EOL Sounding Composite (ESC) File Format Description

The ESC is a columnar ASCII format consisting of 15 header records for each sounding followed by the data records with associated data quality flags.

### 4.1 Header Records

The header records (15 total records) contain a variety of metadata about the sounding (i.e. location, time, radiosonde type, etc). The first five header lines contain information identifying the sounding, and have a rigidly defined form. The following 7 header lines are used for auxiliary information and comments about the sounding, and may vary from dataset to dataset. The last 3 header records contain header information for the data columns. Line 13 holds the field names, line 14 the field units, and line 15 contains dashes ('-' characters) delineating the extent of the field.

The file standard header lines are as follows:

Line	Label (padded to 35 char)	Contents
1	Data Type:	Description of the type and resolution of data
2	Project ID:	Short name for the field project
3	Release Site Type/Site ID:	Description of the release site.
4	Release Location (lon,lat,alt):	Location of the release site.
5	UTC Release Time (y,m,d,h,m,s):	Time of release.

The release location is given as:

lon (deg min), lat (deg min), lon (dec. deg), lat (dec. deg), alt (m)

Longitude in deg min is in the format: ddd mm.mm'W where ddd is the number of degrees (with leading zeros if necessary), mm.mm is the decimal number of minutes, and W represents W or E for west or east longitude, respectively. Latitude has the same format as longitude, except there are only two digits for degrees and N or S for north/south latitude.

The time of release is given as: yyyy, mm, dd, hh:nn:ss.

Where yyyy is the year, mm is the month, dd is the day of month, and hh:nn:ss are the UTC hour, minute, and second respectively.

The seven non-standard header lines may contain any label and contents. The labels are padded to 35 characters to match the standard header lines. In this data set the non-standard header records vary depending on the data source.

### 4.2 Data Records

The data records each contain time from release, pressure, temperature, dew point, relative humidity, U and V wind components, wind speed and direction, ascent rate, balloon position data, altitude, and quality control flags (see the QC code description). Each data line contains 21 fields, separated by spaces, with a total width of 130 characters. The data are right-justified within the fields. All fields have one decimal place of precision, with the exception of latitude and longitude, which have three decimal places of precision. The contents and sizes of the 21 fields that appear in each data record are as follows:

Field	Width	Format	Parameter	Units	Missing Value
1	6	F6.1	Time since release	Seconds	9999.0
2	6	F6.1	Pressure	Millibars	9999.0
3	5	F5.1	Dry-bulb Temperature	Degrees C	999.0
4	5	F5.1	Dew Point Temperature	Degrees C	999.0
5	5	F5.1	Relative Humidity	Percent	999.0
6	6	F6.1	U Wind Comp	m/s	9999.0
7	6	F6.1	V Wind Comp	m/s	9999.0
8	5	F5.1	Wind speed	m/s	999.0
9	5	F5.1	Wind direction	Degrees	999.0
10	5	F5.1	Ascent Rate	m/s	999.0
11	8	F8.3	Longitude	Degrees	9999.0
12	7	F7.3	Latitude	Degrees	999.0

13	5	F5.1	Elevation Angle	Degrees	999.0
14	5	F5.1	Azimuth Angle	Degrees	999.0
15	7	F7.1	Altitude	Meters	99999.0
16	4	F4.1	QC for Pressure	Code	99.0
17	4	F4.1	QC for Temperature	Code	99.0
18	4	F4.1	QC for Humidity	Code	99.0
19	4	F4.1	QC for U Wind	Code	99.0
20	4	F4.1	QC for V Wind	Code	99.0
21	4	F4.1	QC for Ascent Rate	Code	99.0

Fields 16 through 21 contain the data quality flags from the NCAR/Earth Observing Laboratory (EOL) sounding quality control procedures. The data quality flags are defined as follows:

Code	Description
1.0	Checked, datum seems physically reasonable. ("GOOD")
2.0	Checked, datum seems questionable on a physical basis. ("MAYBE")
3.0	Checked, datum seems to be in error. ("BAD")
4.0	Checked, datum is interpolated. ("ESTIMATED")
9.0	Checked, datum is missing. ("MISSING")
99.0	Unchecked (QC information is "missing".) ("UNCHECKED")

# 4.3 Data Specifics

Details on the radiosonde systems included in this data set are included in this section. Links are included to the documentation for the individual sounding data sets for details on processing and quality control.

### **UIUC Mobile Radiosondes**

34 total radiosondes from 8 January to 9 March 2017

GRAW DFM-09 radiosondes (10 second vertical resolution)

http://data.eol.ucar.edu/datafile/nph-

get/534.026/readme SNOWIE UIUC radiosonde ESC.pdf

http://data.eol.ucar.edu/datafile/nph-get/534.001/UIUC MOBILE README.pdf

### **National Weather Service Radiosondes**

2191 total radiosondes from 7 January to 17 March 2017

KBOI, KLKN, KOAK, KOTX, KREV, KRIW, KSLC, KSLE, and KVEF utilized the Lockheed Martin Sippican LMS-6 Radiosonde with the capacitance RH sensor and GPS windfinding

KFGZ, KMFR, KNKX, KTFX, KTWC, and KUIL utilized the Vaisala RS92-NGP radiosonde with twin alternatively heated Humicap capacitance RH sensors and GPS windfinding

All at 1 second resolution

http://data.eol.ucar.edu/datafile/nph-

get/534.004/readme\_SNOWIE\_NWS\_radiosonde.pdf

### **IPC Crouch Radiosondes**

69 radiosondes at 1 second resolution
Lockheed Martin LMS6 Radiosondes using GPS for windfinding

http://data.eol.ucar.edu/datafile/nphget/534.023/readme SNOWIE IPC Crouch radiosonde ESC.pdf http://data.eol.ucar.edu/datafile/nphget/534.019/SNOWIEUpperAir readme.pdf

### **IPC Lowman Radiosondes**

69 radiosondes at 1 second resolution
Lockheed Martin LMS6 Radiosondes using GPS for windfinding
<a href="http://data.eol.ucar.edu/datafile/nph-get/534.024/readme\_SNOWIE\_IPC\_Lowman\_radiosonde\_ESC.pdf">http://data.eol.ucar.edu/datafile/nph-get/534.020/SNOWIEUpperAir\_readme.pdf</a>

### **NCAR SLW Horseshoe Bend Radiosondes**

12 radiosondes at 3 second resolution iMet-1-RSB radiosondes

http://data.eol.ucar.edu/datafile/nph-

The data are in files by day, so all soundings for a particular day are concatenated into a single file ordered by time. The file naming convention is:

SNOWIE\_yyyymmdd.cls where yyyy is the year, mm is the month, and dd is the day of the month.

# 4.4 Sample Data

The following is a sample of the high resolution radiosonde data in ESC format.

```
Data Type:
                                                 NCAR SLW Sounding Data/Ascending
Project ID:
Release Site Type/Site ID:
                                                 SNOWIE
                                                 Horseshoe Bend, ID
                                                 116 12.11'W, 43 54.52'N, -116.202, 43.909, 793.0 2017, 01, 18, 23:13:00
Release Location (lon, lat, alt):
UTC Release Time (y,m,d,h,m,s):
Radiosonde Type:
Ground Station Software:
                                               SkySonde V1.1.1.1
Nominal Release Time (y,m,d,h,m,s):2017, 01, 18, 23:13:00
 Lat Ele
                                                                                               Lon
                                                                                                                           MixR
                                                                                                                                               Qp
                                                                                                                           g/kg m
                                                                                 m/s deg de
                                                                                                           deg deg
                                                                                                                                             code code code code code

    0.0
    917.5
    -4.5
    -8.0
    76.5
    9999.0
    9999.0
    999.0
    999.0
    -128.077
    -0.059
    999.0
    2.3

    3.0
    917.4
    -4.5
    -8.0
    76.5
    9999.0
    9999.0
    999.0
    0.3
    -129.013
    0.760
    999.0
    2.3

    6.0
    917.3
    -4.5
    -8.0
    76.6
    9999.0
    9999.0
    999.0
    0.3
    -119.125
    13.337
    999.0
    2.3

                                                                                                                                     793.0 1.0 1.0 1.0 9.0 9.0 9.0
                                                                                                                                      793.9
```

### 4.5 Station List

Site ID	WMO ID	Site Name	State	Latitude	Longitude	Elev (m)
KBOI	72681	Boise	ID	43.568	-116.211	873
KFGZ	72376	Flagstaff	AZ	35.231	-111.820	2179
KLKN	72582	Elko	NV	40.860	-115.742	1593
KMFR	72597	Medford	OR	42.377	-122.882	398
KNKX	72293	San Diego	CA	32.845	-117.124	137
KOAK	72493	Oakland	CA	37.745	-122.224	3
KOTX	72786	Spokane	WA	47.682	-117.627	729
KREV	72489	Reno	NV	39.568	-119.795	1518

KRIW	72672	Riverton	WY	43.065	-108.477	1699
KSLC	72572	Salt Lake City	UT	40.773	-111.955	1289
KSLE	72694	Salem	OR	44.910	-123.010	62
KTFX	72776	Great Falls	MT	47.461	-111.385	1134
KTWC	72274	Tucson	AZ	32.228	-110.956	741
KUIL	72797	Quillayute	WA	47.935	-124.560	57
KVEF	72388	Las Vegas	NV	36.047	-115.185	697
KLOW	N/A	Lowman	ID	44.100	-115.459	1315
KCRH	N/A	Crouch	ID	44.149	-115.990	1082
NCAR	N/A	Horseshoe	ID	43.909	-116.202	793
SLW		Bend				

The UIUC radiosondes were from a mobile system and were released from several locations.

# **5.0 Data Quality Control Procedures**

- 1. Each sounding was converted from its original format into the ESC format described above.
- 2. Each sounding was passed through a set of automated data quality checks which included basic gross limit checks as well as rate of change checks. This is further described in Section 4.1.
- 3. Each sounding was visually examined utilizing the NCAR/EOL XQC sounding quality control software. This is further described in Section 4.2.

# **5.1 Automated Data Quality Checks**

This data set was passed through a set of automated data quality checks. This procedure includes both gross limit checks on all parameters as well as rate-of-change checks on temperature, pressure, and ascent rate. A version of these checks is described in Loehrer et al. (1996) and Loehrer et al. (1998).

### **5.1.1 Gross Limit Checks**

These checks were conducted on each sounding and the data quality flags in the ESC files were adjusted as appropriate. Only the data point under examination was flagged. All checks also produced warning messages that specified the location of the problem and the severity of the issue. These warning messages where then summarized statistically and examined to determine any consistent issues.

For this data set NCAR/EOL conducted the following gross limit checks. In the table P = P pressure, P = P temperature, P = P wind component, P = P wind component, P = P wind component, P = P and P = P wind component, P = P and P = P wind component, P = P wind P = P wind

Parameter	Check	Parameter(s) Flagged	Flag Applied
Pressure	<0 or > 1050	Р	В
Altitude	< 0 or >40000	P, T, RH	Q
Temperature	< -90 or > 45	Т	В
Dew Point	< -99.9 or > 33	RH	Q

	> T	T, RH	Q
Wind Speed	< 0 or > 100	U, V	Ò
	> 150	U, V	В
U Wind	< 0 or > 100	U	Ò
	> 150	U	В
V Wind	< 0 or > 100	V	Ò
	> 150	V	В
Wind Direction	< 0 or > 360	U, V	В
Ascent Rate	< -10 or > 10	P, T, RH	Q

## **5.1.2 Vertical Consistency Checks**

These checks were conducted on each sounding and the data quality flags in the ESC files were adjusted as appropriate. These checks were started at the surface and compared each neighboring data record. In the case of checks that ensured that the values increased/decreased as expected, only the data point under examination was flagged. However, for the other checks, all of the data points used in the examination were flagged. All items within the table are as previously defined. All checks also produced warning messages that specified the location of the problem and the severity of the issue. These warning messages where then summarized statistically and examined to determine any consistent issues.

Parameter	Check	Parameter(s) Flagged	Flag Applied
Time	Decreasing/equal	None	None.
Altitude	Decreasing/equal	P, T, RH	Q
Pressure	Increasing/equal	P, T, TH	Q
	> 1mb/s or < -1mb/s	P, T, TH	Q
	> 2mb/s or < -2mb/s	P, T, TH	В
Temperature	< -15°C/km	P, T, RH	Q
	< -30°C/km	P, T, RH	В
	> 50°C/km	P, T, RH	Q
	> 100°C/km	P, T, RH	В
Ascent Rate	> 3m/s or < -3m/s	Р	Q
	> 5m/s or < -5m/s	Р	В

# **5.2 Visual Data Quality Checks**

Each sounding was visually examined using the NCAR/EOL XQC sounding data quality control software. This software allows the user to view a skew-t/log-p diagram of each sounding and apply data quality flags as appropriate. The user can zoom in on sections of soundings for detailed examination and can adjust the data quality flags for an individual point, sections of soundings, or entire soundings for each parameter individually. The software also allows the user to override the quality flags applied by the automated procedure.

# **5.3 Data Quality Issues of Note**

See the readme files linked above for details on the data quality issues in each individual sounding data set.

### 6.0 References

Blestrud, D. 2018. Idaho Power Company Crouch Sounding Data [IPC]. Version 1.0. UCAR/NCAR - Earth Observing Laboratory. <a href="https://doi.org/10.5065/D67S7MJ9">https://doi.org/10.5065/D67S7MJ9</a>. Accessed 19 Feb 2018.

Blestrud, D. 2018. Idaho Power Company Lowman Sounding Data [IPC]. Version 1.0. UCAR/NCAR - Earth Observing Laboratory. <a href="https://doi.org/10.5065/D6CJ8C7K">https://doi.org/10.5065/D6CJ8C7K</a>. Accessed 19 Feb 2018.

Janiszeski, A. 2018. UIUC Mobile Radiosonde Data. Version 1.0. UCAR/NCAR - Earth Observing Laboratory. <a href="https://doi.org/10.5065/D6MS3RHD">https://doi.org/10.5065/D6MS3RHD</a>. Accessed 19 Feb 2018.

Loehrer, S. M., T. A. Edmands, and J. A. Moore, 1996: TOGA COARE upper-air sounding data archive: development and quality control procedures. Bull. Amer. Meteor. Soc., 77, 2651-2671.

Loehrer, S. M., S. F. Williams, and J. A. Moore, 1998: Results from UCAR/JOSS quality control of atmospheric soundings from field projects. Preprints, Tenth Symposium on Meteorological Observations and Instrumentation, Phoenix, AZ, Amer. Meteor. Soc., 1-6.

Serke, D. 2018. NCAR SLW Radiosonde Data. Version 1.0. UCAR/NCAR - Earth Observing Laboratory. <a href="https://doi.org/10.5065/D60K27BX">https://doi.org/10.5065/D60K27BX</a>. Accessed 21 Feb 2018.

UCAR/NCAR - Earth Observing Laboratory. 2017. National Weather Service High Resolution Radiosonde Data. Version 1.0. UCAR/NCAR - Earth Observing Laboratory. <a href="https://doi.org/10.5065/D6D21WBZ">https://doi.org/10.5065/D6D21WBZ</a>. Accessed 19 Feb 2018.